

# Push-pull Connectors

Part No: 1KLGGD14CLL



[www.rlcables.com](http://www.rlcables.com)

1T Series 14-Cores , Fixed receptacle



Technical parameter :

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>3000 times
Temperature range	-55°C / +200°C
Water resistance level	IP68
Adapter cable	1.00-14.60 mm

Electric properties	
Internal components	14 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.5 mm
Salt spray test	>144Hr
Maximum contact resistance	8.7 mOhm
Rated current	2 A
Test voltage ( Contact - Shell )	1.7 KV ( DC )


# Push-pull Connectors

Part No: 1KLGGD14CLL




[www.rlcables.com](http://www.rlcables.com)

Drawing:

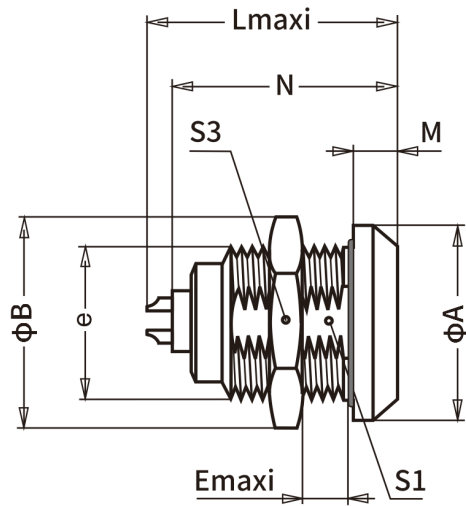

Insert Configuration  
Rear View

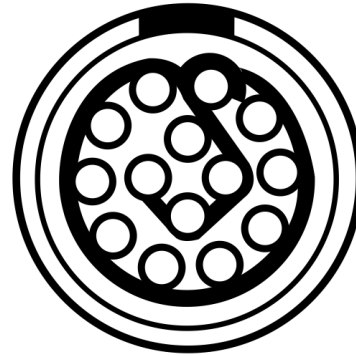

Size (mm)								
A	B	e	E	L	M	N	S1	S2
20.0	21.5	M16*1.0	9.0	27.0	4.5	25.1	14.5	19.0