

Push-pull Connectors

Part No: 2TLGGD16CLL



www.rlcables.com

2T Series 16-Cores , Fixed receptacle



Technical parameter :

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>3000 times
Temperature range	-55°C / +200°C
Water resistance level	IP68
Adapter cable	1.00-12.60 mm

Electric properties	
Internal components	16 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.7 mm
Salt spray test	>144Hr
Maximum contact resistance	6.1 mOhm
Rated current	6 A
Test voltage (Contact - Shell)	1.8 KV (DC)


Push-pull Connectors

Part No: 2TLGGD16CLL




www.rlcables.com

Drawing:

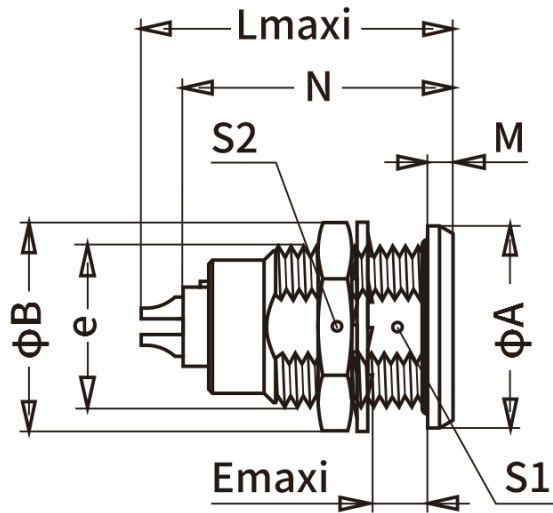

Insert Configuration
Rear View



Size (mm)								
A	B	e	E	L	M	N	S1	S2
18.5	19.6	M15*1.0	7.5	26.5	1.8	24.6	13.5	17.0