

# Push-pull Connectors

Part No: 4BLGGD40CLL



[www.rlcables.com](http://www.rlcables.com)

## 4B Series 40-Cores , Fixed receptacle



### Technical parameter:

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>5000 times
Temperature range	-55°C / +250°C
Water resistance level	IP50
Adapter cable	4.00-23.60mm

Electric properties	
Internal components	40 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.7 mm
Salt spray test	>144Hr
Maximum contact resistance	6.1 mOhm
Rated current	3 A
Test voltage ( Contact - Shell )	1.4 KV ( DC )


# Push-pull Connectors

Part No: 4BLGGD40CLL




[www.rlcables.com](http://www.rlcables.com)

Drawing:

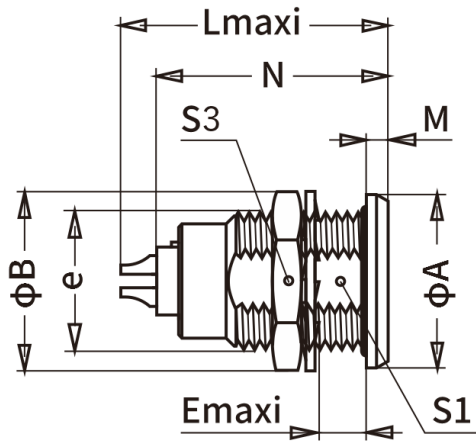

Insert Configuration  
Rear View



Size (mm)								
A	B	e	E	L	M	N	S1	S3
28.0	34.0	M25*1.0	12.0	35.7	2.5	34.1	23.5	30.0