

# Push-pull Connectors

Part No: 2BLGGD14CLL



[www.rlcables.com](http://www.rlcables.com)

## 2B Series 14-Cores , Fixed receptacle



Technical parameter:

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>5000 times
Temperature range	-55°C / +250°C
Water resistance level	IP50
Adapter cable	2.00-13.60mm

Electric properties	
Internal components	14 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.7mm
Salt spray test	>144Hr
Maximum contact resistance	6.1 mOhm
Rated current	6.5 A
Test voltage ( Contact - Shell )	2KV ( DC )


# Push-pull Connectors

Part No: 2BLGGD14CLL




[www.rlcables.com](http://www.rlcables.com)

Drawing:

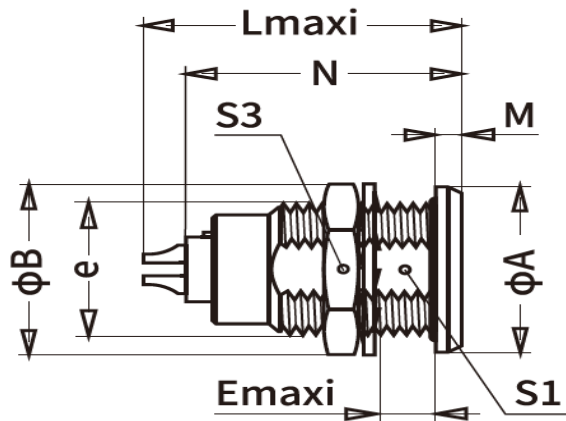

Insert Configuration  
Rear View



Size(mm)								
A	B	e	E	L	M	N	S1	S3
18.0	19.2	M15*1.0	8.5	26.7	1.8	24.6	13.5	17.0