

Push-pull Connectors

Part No: 0TLGGD04CLL



www.rlcables.com

0T Series 4-Cores , Fixed receptacle



Technical parameter:

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>3000 times
Temperature range	-55°C / +200°C
Water resistance level	IP68
Adapter cable	1.00-8.30mm

Electric properties	
Internal components	4 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.7mm
Salt spray test	>144Hr
Maximum contact resistance	6.1 mOhm
Rated current	7A
Test voltage (Contact - Shell)	1KV (DC)


Push-pull Connectors

Part No: 0TLGGD04CLL



www.rlcables.com

Drawing:

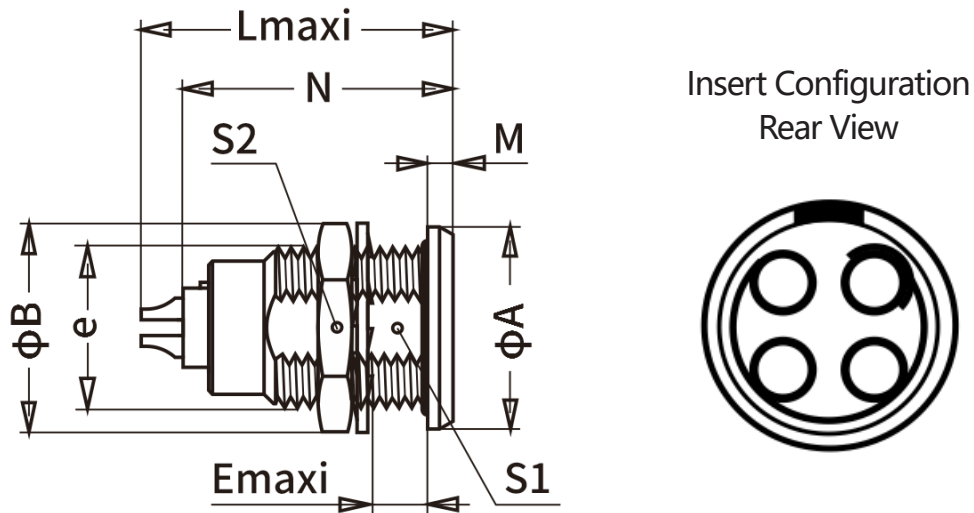

Size (mm)								
A	B	e	E	L	M	N	S1	S2
12.0	12.5	M9*0.6	6.0	21.0	1.5	19.1	8.2	11.0