

# Push-pull Connectors

Part No: 0TLLGD09CLL



[www.rlcables.com](http://www.rlcables.com)

## 0T Series 9-Cores , Fixed receptacle



### Technical parameter:

Mechanical Properties	
Shell style	Fixed receptacle
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>3000 times
Temperature range	-55°C / +200°C
Water resistance level	IP68
Adapter cable	1.00-8.30mm

Electric properties	
Internal components	9 Pins
Conductor Structure	Brass gold plated
insulation	Peek
Conductor diameter	0.5mm
Salt spray test	>144Hr
Maximum contact resistance	8.7 mOhm
Rated current	2.5A
Test voltage ( Contact - Shell )	1.6KV ( DC )


# Push-pull Connectors

Part No: 0TLLGD09CLL




[www.rlcables.com](http://www.rlcables.com)

Drawing:

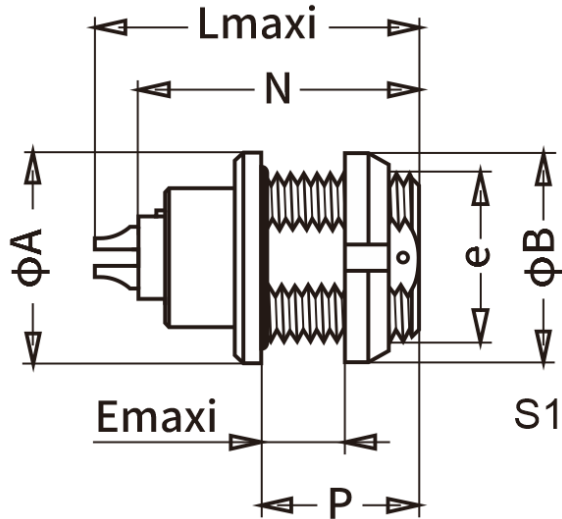

Insert Configuration  
Rear View



Size (mm)							
A	B	e	E	L	N	P	S1
12.0	12.0	M9*0.6	6.5	21.0	19.1	9.0	8.2