

Push-pull Connectors

Part No: 00RGGD03CLAD35Z



www.rlcables.com

00 Series 3-Cores , Straight plug , Sheath type



Technical parameter

Mechanical Properties	
Shell style	Straight plug
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>5000 times
Temperature range	-55° C / +250° C
Water resistance level	IP50
Adapter cable	2.80-3.50mm

Electric properties	
Internal components	3 Pins
Conductor Structure	Brass gold plated
Insulation	Peek
Conductor diameter	0.5mm
Salt spray test	>144Hr
Maximum contact resistance	8.7 mOhm
Rated current	3.5A
Test voltage (Contact - Shell)	1.4KV(DC)


Push-pull Connectors

Part No: 00RGGD03CLAD35Z



www.rlcables.com

Drawing

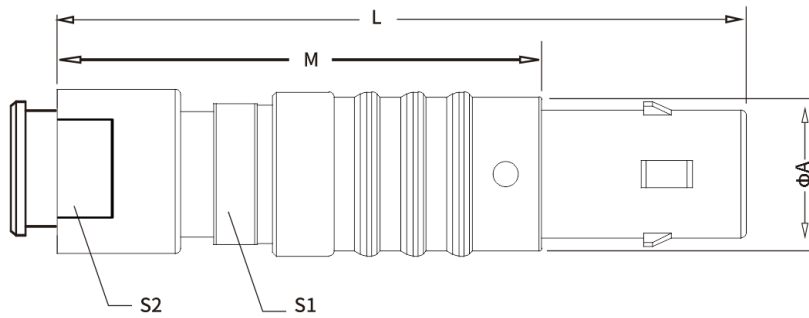

Insert Configuration
Rear View



Size (mm)				
A	L	M	S1	S2
6.4	28.7	20.7	5.5	6.0