

Push-pull Connectors

Part No: 00LRAD01CLL



www.rlcables.com

00 Series 1-Cores , Straight plug



Technical parameter :

Mechanical Properties	
Shell style	Straight plug
Sheating material	Brass shell and collet nut , nickel plated. Brass latch sleeve and mid pieces
Colour	Grey
Locking method	Push-pull
Plug-and-play count	>5000 times
Temperature range	—
Water resistance level	IP50
Adapter cable	—

Electric properties	
Internal components	1 Pins
Conductor Structure	Brass gold plated
Insulation	Peek
Conductor diameter	0.7 mm
Salt spray test	>144Hr
Maximum contact resistance	6.1 mOhm
Rated current	4 A
Test voltage (Contact - Shell)	2.1 KV (DC)


Push-pull Connectors

Part No: 00LRAD01CLL



www.rlcables.com

Drawing

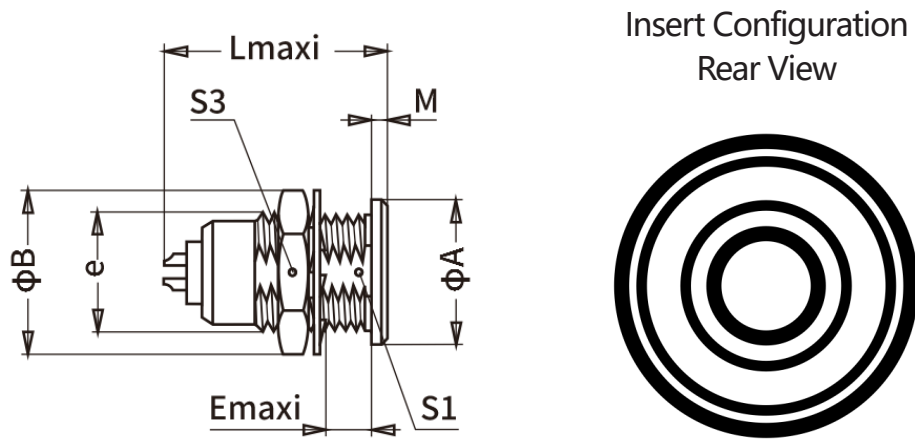

Size (mm)								
A	B	e	E	L	L ¹	M	S1	S3
8.0	10.2	M7*0.5	5.5	—	14.5	1.0	6.3	9.0